



MultiBio 700



Introduction

MultiBio 700 is a new generation multiple biometric identification product, standard integrating with Face, Fingerprint, PIN recognition and optional with RFID mode, as to facial identification algorithm, it captures the relative position, size, and shape of user's eyes, nose, cheekbones, and jaw features, these feature templates are used to be matching feature data, when users verify on device, it distills captured features into value and compares with templates to eliminate variance. MultiBio 700 may hold 400 faces (optional 3000) without dividing groups, its default identification mode is Fingerprint & Face, additionally, as it is a kind of professional access control facial device, it may work with the third party such as electric lock, alarm, door bell, sensor and so on, in order to improve security for human life and enterprise information.

Copyright © 2010, ZKSoftware, Inc. All rights reserved.

ZKSoftware may, at any time and without notice, make changes or improvements to the products and services offered and/or cease producing or commercializing them. The ZKSoftware logo and trademark are the property of ZKSoftware Inc.

Features:


- Elegant ergonomic design
- Default verification mode is Fingerprint & Face, available to choose other 19 modes, such as RFID & Face, Password & Face, Fingerprint only or RFID only
- TCP/IP, RS232/485 communication and USB Host.
- 3.0 inch TFT touch screen, T9 Input, 9 Digit User ID.
- 2 user-defined function keys, the left one is for door belling, the right one is for shift of identification mode.
- Infra-red optical system enables user-identification in poorly lit environments.
- Wiegand input for working with wiegand reader, wiegand output for connecting to access control panel.
- Optional with ID card module or Mifare card module
- Professional access control compatible with the 3rd party door sensor, alarm, exit button, wired bell and electric lock.
- 50 time zones, 99 groups and 10 unlock combinations, anti-pass back and dismantle function.

Configuration:

Standalone



Work Together with Controller

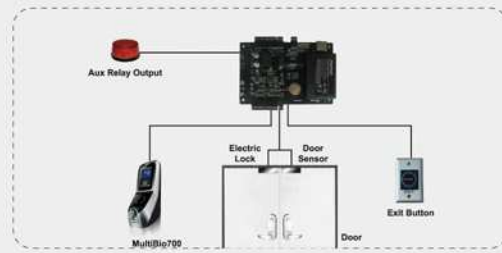

Specifications:

CPU	ZK Multi-Bio CPU 630MHz
Memory	256M Flash, 64M SDRAM
Hardware Platform	ZEM600
Fingerprint Sensor	ZK Optical Sensor
Camera	High Resolution Infrared Camera
Display	3 Inch Touch Screen
Face Capacity	400(optional 3000)
Fingerprint Capacity	2000(optional 5000)
ID Card Capacity	10,000(optional function)
Logs Capacity	100,000
Algorithm Version	ZKFace7.0(optional ZKFace5.0) & ZKFinger10.0/9.0
Communication	TCP/IP, RS232/485, USB Host
Access Control Interfaces for	3rd party electric lock, door sensor, alarm, wired bell and exit button
Anti-pass back Function	OK
Wiegand Signal	Wiegand in and out
Optional Functions	ID Card, Mifare card
Power Supply	12V/3A
Operating Temperature	0°C -45°C
Operating Humidity	20%-80%
Dimension	275(L)*100(H)*195(W) mm
Gross Weight	0.87 kg

ZKSoftware Inc.

ZK Mansion, Wuhe Rd, Gangtuo, Bantian, Buji Town, Longgang District, Shenzhen China 518129
Tel: 86-755-8960 2345/46/47/48 Fax: 86-755-8960 2675 www.zksoftware.com

